

# BLAZE NATURAL PLUS

The wood boiler that combines technology and tradition



**7** years warranty  
on the boiler body

The BLAZE NATURAL PLUS boiler offers a combination of technological sophistication and simplicity of operation. This makes it the ideal solution for the simple replacement of

existing unsuitable boilers. The boiler includes a simplified control unit, which does not offer all the functions of other models, but is characterised by its simplicity of operation.

## Benefits of BLAZE NATURAL PLUS

- Possibility of installation without buffer tank \*
- Certified power adjustability of 30–100 %
- 4 patents in one boiler (fuel detection, mixing of return water, three-way air supply, rayshaped nozzle)
- Insulated stocking chamber
- Lever for cleaning exchanger
- Possibility of gravity connection
- Compact dimensions

\* However, it is important to note that the installation of a boiler without a buffer tank is not suitable for every building. It depends on the heat loss of the heated house and other characteristics of the particular heating circuit. For more information on the possible installation of a boiler without a buffer tank, please refer to the boiler's operating and installation instructions or contact your installer.



More  
info about  
the boiler



## Technical parameters

	BNP 17	BNP 25	BNP 40
Nominal output (kW)	17	26	40
Adjustable output (kW)	5–17	8–26	12–40
Efficiency (%)	90	90	90
Emission class	5		
Ecodesign	YES		
Energy class	A+		
Log length (cm)	25	33	50
Stocking chamber volume (l)	40	80	120
Boiler weight (kg)	245	340	440
Maximum operating pressure (bar)	3		
Water volume (l)	32	40	55

## Dimensions

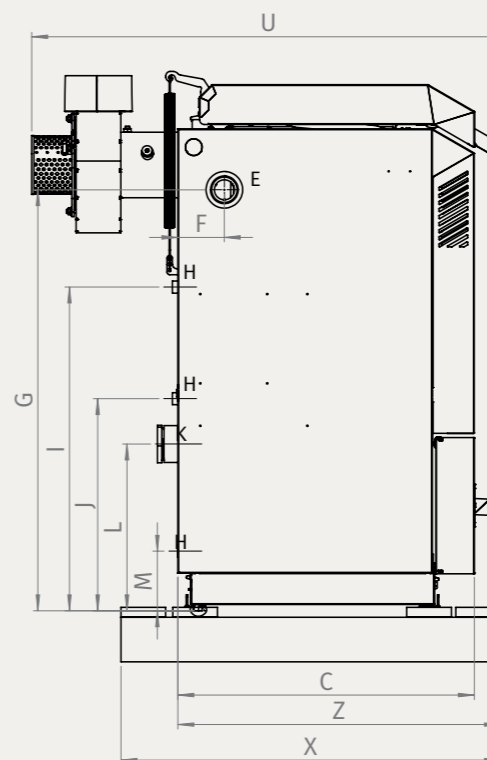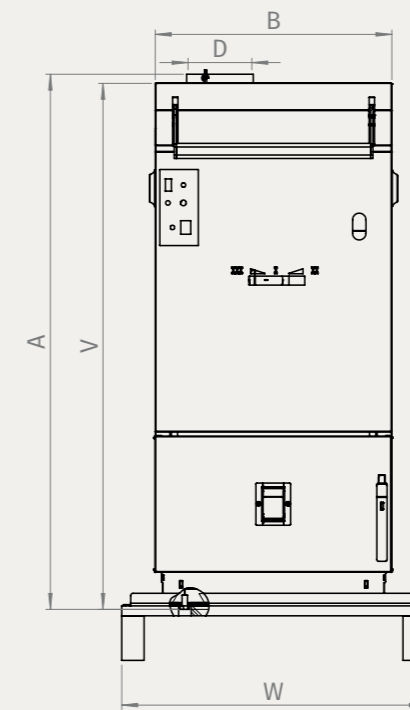

	BNP 17 (mm)	BNP 25 (mm)	BNP 40 (mm)
A	1200	1200	1200
B	450	530	714
C	584	664	664
D	Ø149	Ø149	Ø149
E	G 6/4"	G 6/4"	G 6/4"
F	104	104	104
G	939	939	939
H	G 1/2"	G 1/2"	G 1/2"
I	721	721	721
J	471	471	471
K	G 2 1/2" *	G 2 1/2" *	G 2 1/2" *
L	280	370	370
M	100	130	130
N	113	113	113
O	995	995	995
P	200	200	200
R	Ø141	Ø141	Ø141
S	18	18	18
U	960	1040	1040
V	1176	1176	1176
W	680	680	870
X	850	850	850
Y	225	265	324
Z	627	707	707

\* Cold water inlet to the boiler reduced to G 6/4"

BLAZE NATURAL PLUS

9



9

BLAZE NATURAL PLUS

9

